

# 24" Wide Designer Gear Lockers – 30000 Series Installation Instructions

Thank you for selecting the 30000 24" Wide Designer Gear Lockers. We are confident that the quality and construction of the lockers will prove to be a good investment. These instructions are intended to assist you in a typical wall-anchored or back-to-back locker installation. Individual job conditions will dictate the type of fasteners and whether the lockers must be anchored to the wall, the floor, or both.

The 30000 24" Wide Designer Gear Lockers require minimal assembly. The basic lockers are factory assembled. It may be necessary to attach the lockers to each other, the optional side panels to the exposed sides of the lockers, and the lockers to a wall.

## Hardware Supplied with Each Locker

1. (1) Metal wall strap with three holes to attach locker to wall or back-to-back. Bend the strap to tie locker to wall as shown in illustration.
2. (4) #8 x 5/8" long pan head sheet metal screws to attach strap to top of lockers back-to-back or between locker and wall.
3. (2) 1-1/4" barrel nuts with screws to fasten lockers together side-by-side.
4. (2) 1-1/4" long wood screws to attach side panel to locker.
5. (2) Number plates.

## Installation Instructions

1. Wooden slats are attached to the bottom of the base with finishing nails to support the unit during shipping - remove them by tapping them away from the base with a mallet, then remove any remaining finishing nails.

Lockers should be set in place and leveled. The rear edge of the base should touch the wall or the other base if lockers are installed back-to-back. There will be a 5/8" air space between the rear surface of the locker body and the wall or a 1-1/4" air space between the rear surfaces of the back-to-back lockers.

2. If the back of the locker is against a wall, bend the metal strap as shown in the illustration. The metal straps will be installed in Step 5 below.

Leave the metal strap flat for fastening lockers back-to-back. There will be a 1-1/4" ventilation space between the backs of the locker bodies if lockers are back-to-back and side panels are being installed. The metal straps will be installed in Step 5 below.


3. Bolt multiple lockers together through the two unused holes near the front edge of the locker sides. The same holes are used to attach the optional finished side panels.

4. Attach the optional finished side panels flush with the front of the locker body, allowing the excess width to cover the 5/8" rear air space.

5. Once the lockers are plumb and level, attach the bent or flat metal straps to the top of the lockers and to the wall or other lockers as required.

6. Peel backing from number plates, align, and press into recess.

## Installation Illustration

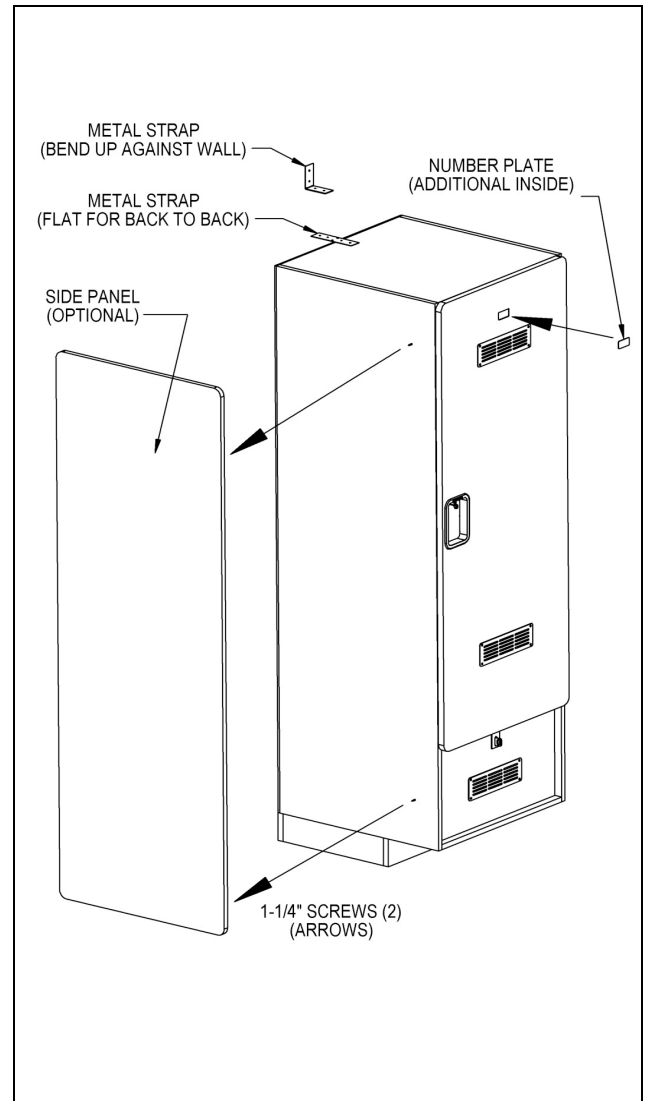

## SALSBURY INDUSTRIES

18300 Central Avenue, Carson, CA 90746-4008

Phone: 1-800-562-5377

Int'l Phone: 323-846-6700

Fax: 1-800-562-5399

Int'l Fax: 323-846-6800

www.lockers.com

engineering@lockers.com